


GEARED TRACTION MACHINE

tusker
Flame Proof



Static Load (kg)
7000

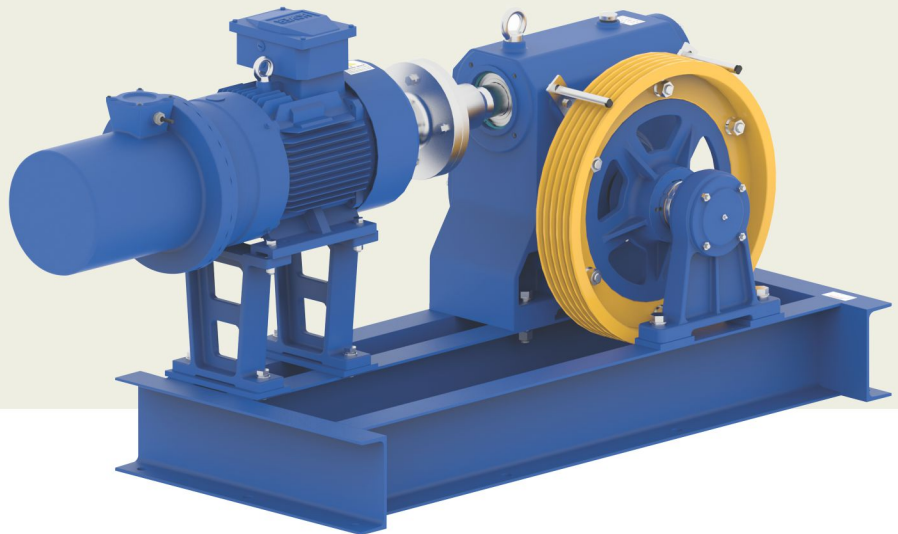

Duty Load (kg)
3000



Gear Ratio
1/46

Max. Allow Weight
Car + Car Frame
+ Operator
2000 (kg)



Oil Capacity (Ltr)
10.0



Weight of Machine (kg)
750* (With Bed Plate)*

* Weight of machine is varies according to selection of sheave, Motor & Drive system.



GEARED

TRACTION MACHINE

tusker
Flame Proof

Roping 2:1 | Travelling : 15 mtr

Machine	Duty Load	Async. Speed	Gear Ratio	Motor Detail		RPM	Rated Current	Sheave Specification	Max. Allow Weight (Car + Car Frame + Operator)
	(Kg)	(m/sec)		(kw)	(HP)			Sheave Dia X Rope Dia X No. of Groove	(Kg)
TUSKER	2500	0.5	1/46	14.5	20.0	1455	31.0	Ø600 X 13mm X 5 Grv	1500
	3000	0.5	1/46	14.5	20.0	1455	31.0	Ø600 X 13mm X 5 Grv	2000

