GEARED TRACTION MACHINE







Static Load (kg) 4200



Gear Ratio 1/46



Oil Capacity (Ltr) 6.0



Brake Voltage (DC) 110V, 220V



Weight of Machine (kg) 445*

* Weight of machine is varies according to selection of sheave, motor.










Listed loads don't include the rope's weight. In order to know the net loads capacity, substract rope's weight from the listed loads. Position of the gearbox Counter weight Plant efficiency


Up 50% 0.80

AC VVVF 400 V 50 Hz Travelling : - 30 mtr

Machine	Duty Load		Roping	Async. Speed	Ratio	Motor Detail		RPM	Rated Current	Sheave Specification
	Person	Kg	корту	(m/sec)	Natio	kw	(HP)	(Async.)	(A)	Sheave Dia x Rope Dia. X No. of Groove
ZORRO	16	1088	1:1	1.00	1/46	11.0	15.0	1445	24.5	Ø 600 X 13mm X 4 Grv.
	2000		2:1	0.50	1/46	11.0	15.0	1440	22.0	Ø 600 X 13mm X 4 Grv.

Kindly contact us for various speed and load combination

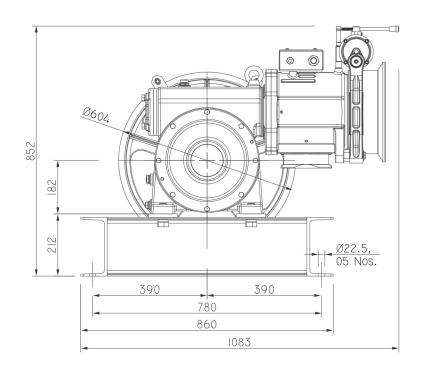

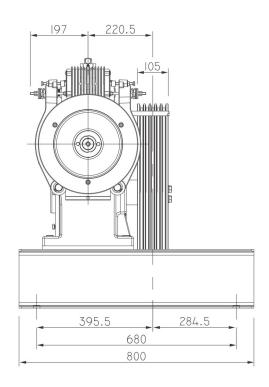

(All dimensions are in mm)