
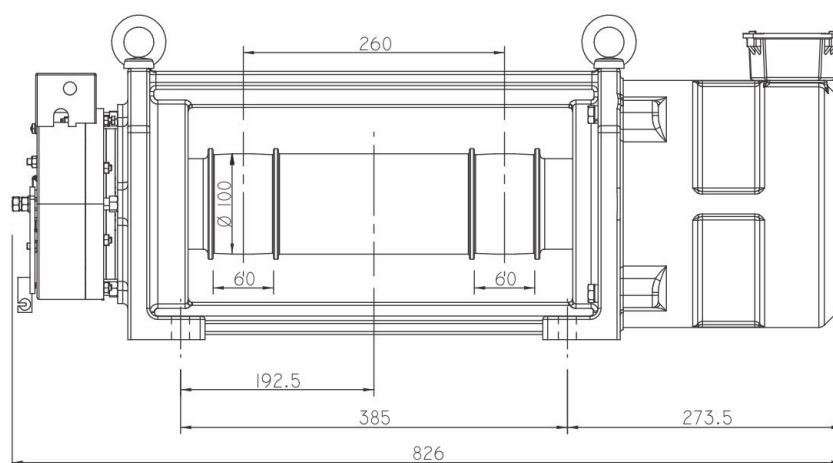
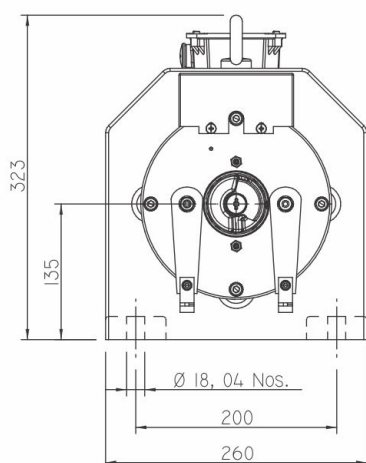


STRIVE-II D

BELT DRIVEN MACHINE

Max. Static Load (Kg)	2300
Duty Load (Kg)	450
Roping	2:1
Sheve Diameter (mm)	100
Supply Voltage	400 V
Brake Voltage	110 VDC
Pole	12
Rating	S5-40%
Insulation	F Class
IP Code	IP 40
Weight of Machine (Kg)	115

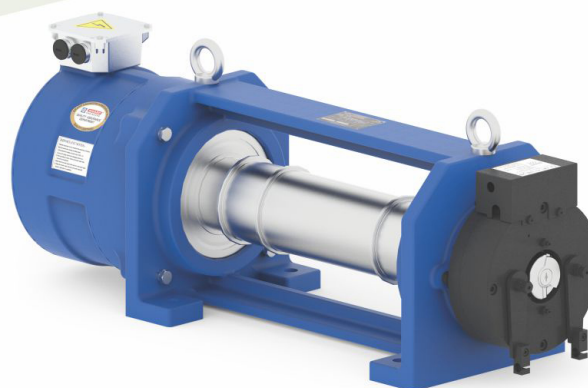

• (All dimensions are in mm) • Subject to change without any prior notice!

Specification	Load (Kg)	Lift Speed (m/sec)	Sheave Dia (mm)	Belt Detail (no x Width)	Sheave Pitch (mm)	Rated Current (A)	Rated Torque (Nm)	Rated RPM	Frequency (Hz)	O/P Power (Kw)
STRIVE-II-D-1.00-408	408	1.00	100	2 X 30	260	5.0	70	382	38.2	2.8
STRIVE-II-D-1.00-450	450	1.00	100	2 X 30	260	5.7	80	382	38.2	3.2

Kindly contact us for various speed and load combination